

easyventTM

Data Sheet

Specification

- Available in 4000mm (70 per box) 3000mm (55 per box) & 2000mm (100) per box) variants
- From 1134mm² to 4320mm² equivalent area
- Made from UV stable ASA
- Snap on screw cover caps
- Multi Position Vent
- Available in colour: White, Mahogany, Golden Oak, Anthracite Grey, Cream, Mixed Colour Combination On Request.
- Tested to BSEN 1026:2000 & BSEND1027:2000

2000 EA 1134 mm²
3000 EA 3456 mm²
4000 EA 4320 mm²

Performance

BS EN 1026:2000 Air Permeability


Window vent	@50Pa(m ³ /hr)	@50Pa(l/s)
3000L	5	1.3
4000L	4	1.1
2000L	3.25	1.17

BS EN 1027:2000 Watertightness

Window vent	Pressure at no leakage (Pa)	Classification
3000L	475	E4
4000L	600	E4
2000L	425	E4

BS EN ISO 717-1: 1997 Airborne Sound Insulation (dB)

Window vent	Dn,e,w (dB) Open
3000L	37
4000L	33
2000L	31.45

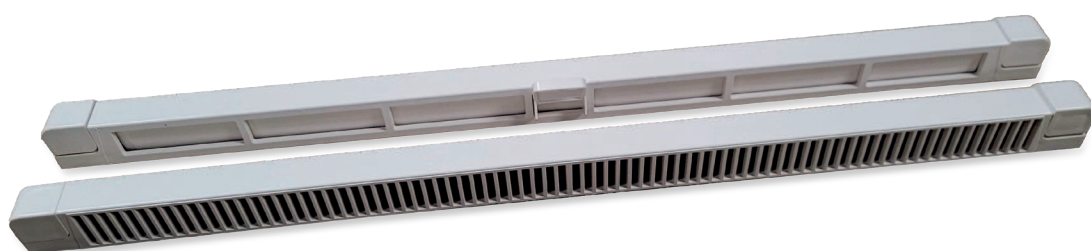

Supplied with a 10 year warranty